




## TOGGLE SWITCHES - SINGLE POLE, SINGLE THROW

(as formerly manufactured by CASTELCO)

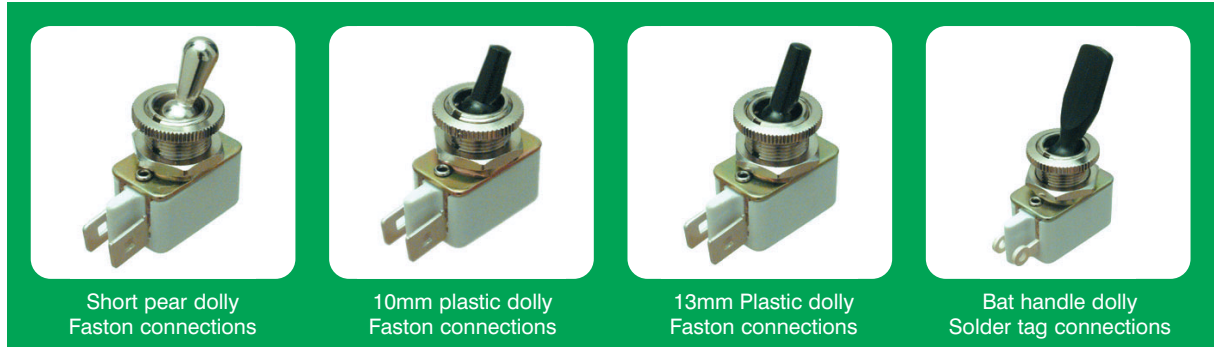

Short pear dolly  
Faston connections

10mm plastic dolly  
Faston connections

13mm Plastic dolly  
Faston connections

Bat handle dolly  
Solder tag connections

### SWITCH

TYPE	ORDER CODE
TOGGLE SWITCH, single pole, single throw	T100

### WIRING

TYPE	ORDER CODE
Faston 0.8 x 6.3mm	FN
Solder tag	ST

### DOLLY

TYPE	Nickel plated brass	Self coloured brass	Black plastic
Short pear	SPN	SPB	-
10mm plastic	-	-	10B
13mm plastic	-	-	13B
Bat handle	-	-	BHB

### ACCESSORIES

TYPE	Nickel plated brass	Self coloured brass	Nickel plated steel
Knurled nut	KN	KB	-
Hexagon nut	HN	HB	-
On/Off legend plate	-	-	LN

### STANDARD SWITCHES

#### ELECTRICAL SPECIFICATION

Contact rating 2A / 250 V a.c. / d.c.  
Switch contacts – brass, silver plated.  
Snap action. Double insulation.


#### STANDARD SPECIFICATION

As standard, each toggle switch will be supplied with two nuts (one Hexagon and one Knurled). If anything different to this is required, it can be indicated in the order codes below.

Switches with nickel plated or plastic dollies will be supplied with nickel plated nuts. Switches with self coloured brass dollies will be supplied with self coloured brass nuts.

Switches with plastic dollies will be supplied with nickel plated bushes

### ORDERING CODES

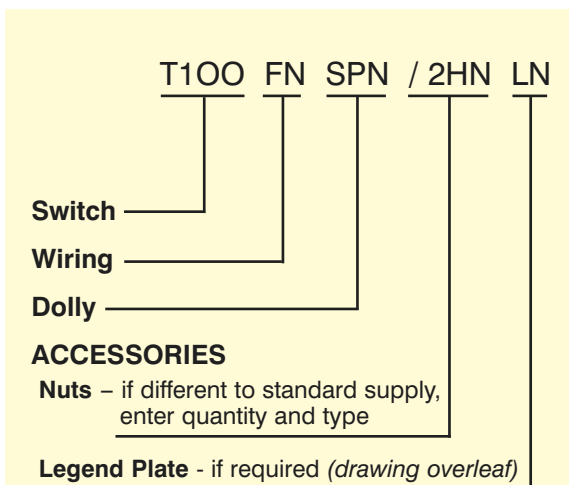

#### ACCESSORIES

**Nuts** – if different to standard supply, enter quantity and type

**Legend Plate** - if required (*drawing overleaf*)

Example above: T100FNSPN/2HNLN is a toggle switch, single pole, single throw, with Faston connections and a short pear dolly that is nickel plated. It will be supplied with two hexagon nuts (not the standard one hexagon and one knurled nut) and a nickel plated legend plate.



# TOGGLE SWITCHES - SINGLE POLE, SINGLE THROW (as formerly manufactured by CASTELCO)

## STANDARD UNITS

**PANEL FIXING NOT EXCEEDING 4.76**

**SPADE TERMINAL KEY-WAY**

**PANEL CUTOUT**

**ON OFF**

**SOLDER TERMINAL**

**PLASTIC DOLLY**

**SHORT PEAR METAL DOLLY**

**KNURLED NUT**

**HEXAGON NUT**

**LEGEND PLATE**

**GENERAL ELECTRICAL SPECIFICATIONS**  
 Contact rating 2A/250 Vac / dc  
 Single pole Single throw  
 Switch contacts Brass silver plated  
 Snap action  
 Quick make and break  
 Double insulation  
 Spade terminal 6.3 wide  
 Solder terminal

## GLOSSARY OF SWITCH TERMINOLOGY

### SINGLE POLE, SINGLE THROW (SPST)

The circuit is turned 'on' and then 'off' with each actuation.

### DOUBLE POLE, SINGLE THROW (DPST)


Two independent circuits are turned 'on' and then 'off' with each actuation.

### SINGLE POLE, DOUBLE THROW (SPDT)

The circuit is turned 'on' and another turned 'off' with each actuation.

### DOUBLE POLE, DOUBLE THROW (DPDT)

Two independent circuits are turned 'on' and two other independent circuits are turned 'off' with each actuation.



**SPST**  
**(T100)**

**SPDT**  
**(T1CH)**

**DPST**  
**(T200)**

**DPDT**  
**(T2CH)**



OMEG LTD, IMBERHORNE INDUSTRIAL ESTATE, EAST GRINSTEAD, WEST SUSSEX, RH19 1RJ, ENGLAND  
 Tel: 01342 410420 Fax: 01342 316253 sales@omeq.co.uk www.omeq.co.uk www.castelco.co.uk

All rights reserved © Omeq Ltd